


Concentric Taping Machine

Encintadora concéntrica


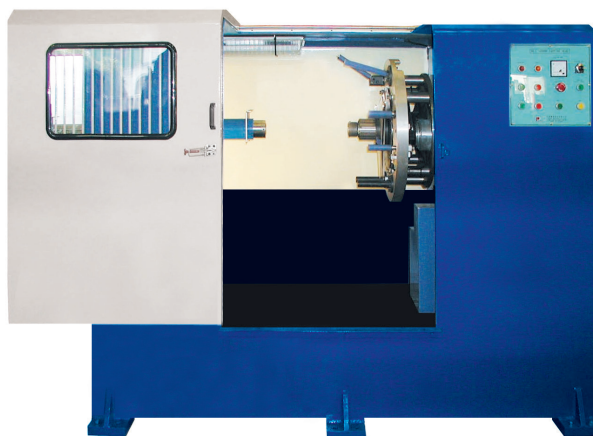


EN

- Concentric taping head machine.
- Suitable for copper and aluminum foils, textile, PE, paper as well as for other “non metal” tapes.
- Tape tension control is done through hysteresis brake.
- Taping head and pulling capstan are driven independently by AC servo motor.
- HMI+PLC control system for pre-setting taping pitch, tape tension compensation and speed synchronization.

ES

- Máquina encintadora concéntrica.
- Apta para cintas de cobre y aluminio, textil, PE, papel o cualquier otro tipo de cinta “no metálica”.
- Control de tensión de la cinta mediante freno de histéresis.
- Accionamiento independiente del cabestrante de tiro y de la encintadora mediante servo motor AC.
- Sistema de control HMI+PLC para la selección del paso, compensación de tensión y sincronizado de velocidad.

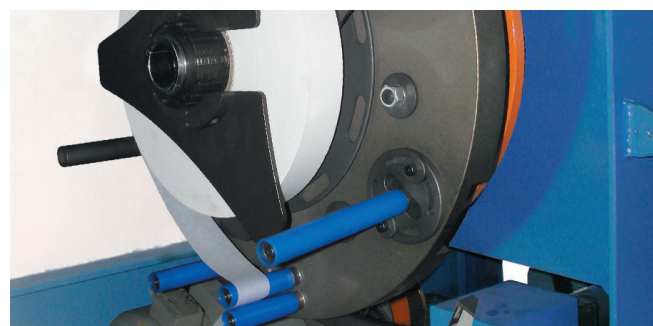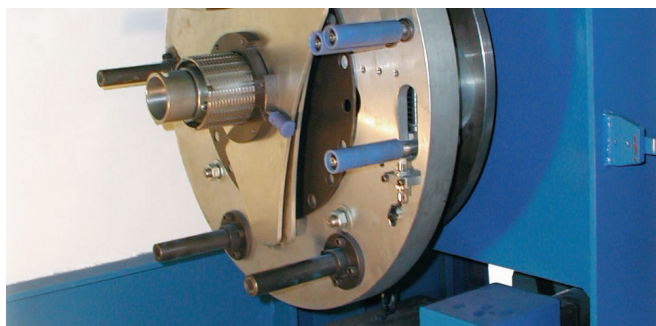

Model / Modelo	NC-50	NC-50L	NC-60
D:	500	500	600
Pad size / Dimensión [mm]:	d: 76	105	105
	W: 20 - 70	20 - 70	20 - 70
Pad load / Capacidad [kg]	50	80	80
Cable Ø / Ø Cable [mm]	30	50	50
Taping speed / Velocidad de encintado [rpm]	1200	1200	850
Pad storage length / Almacenamiento [mm]	600	1000	600
Motor power / Potencia motor [kW] *	7.5 AC	7.5 AC	7.5 AC

* Max. speed depending on pad weight